# OTP Horisontal Krimpeform for Terminalmaskin - Høy Presisjon

Model No. JW-AP11




**SPECIFICATIONS**

| | |
|---|---|
| **Modus** | Horisontal |
| **Teknologi** | Høyfrekvent |
| **Presisjon** | Elektronisk posisjonering |
| **Driftslyd** | Redusert |
| **Energiforbruk** | Sparende |
| **Overføringsmodus** | Praktisk |

OTP terminalkrimpeformer (OTP horisontal modus), trådkrimpemaskin, applikator-chip for terminalmaskinen, JST terminalkrimpemaskin, OTP U-formet form, terminalmaskinapplikator, OTP-form, OTP-terminalform, terminalapplikator, OTP-form, horisontale og vertikale krimpeformer, terminalapplikator, matrise, OTP-form, horisontale og vertikale krimpeformer

OTP-terminalkrimpeformer, OTP horisontal modus, applikator for trådklemmemaskin, bris for terminalmaskin
Superdempet terminalmaskin, bruk av høyfrekvent teknologi, elektronisk presis posisjonering. Motorens driftslyd er mindre enn tradisjonell terminal ved crimping, sparer strøm, overføringsmodus er mer praktisk og unngår vanlige feil når den tradisjonelle terminalclutch/solenoiden møtes.
Vår OTP-terminalapplikasjonsfunksjon: Høy presisjon og holdbar

# OTP horizontal mode

## High precision and durable



# Mold general

Suitable for a variety of molds, widely used








Horizontal mode





Vertical mode





Single grain




## OTP straight mold

Model: OTP straight mold
Weight: 4.5KG
Feeding block: 35mm
Slider stroke: 30mm
Die knife adjustment: scale rotary
Process type: stamping mould
Main processing equipment: terminal crimping
Provide customized processing: Yes

## OTP single grain mold

Model: OTP single grain mold
Weight: 4.5KG
Feeding block: 35mm
Slider stroke: 30mm
Die knife adjustment: scale rotary
Process type: stamping mould
Main processing equipment: terminal crimping
Provide customized processing: Yes

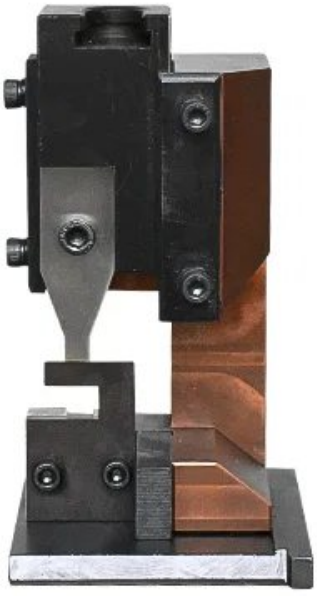



## Single U-shaped mold

Model: Single U-shaped mold

Weight: 4.5KG

Feeding block: 35mm

Slider stroke: 45mm

Die knife adjustment: scale fine adjustment

## OTP U mold



Model: OTP U-shaped mold

Weight: 4.5KG

Feeding block: 25mm

Slider stroke: 30mm

Die knife adjustment: scale rotary

Process type: stamping mould

Main processing equipment: terminal crimping

Provide customized processing: Yes



## Flag model

Model: Flag mold


Weight: 6.5KG

Feeding block: 25mm

Slider stroke: 30mm

Die knife adjustment: scale fine adjustment

## 2000#mold

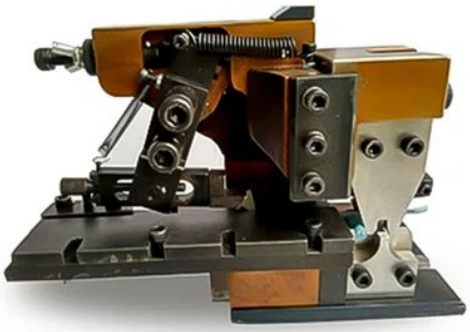

Model: 2000#mold

Weight: 5.2KG

Feeding block: 35mm

Slider stroke: 40-48mm

Die knife adjustment: scale rotary

Process type: stamping mould

Main processing equipment: terminal crimping

Provide customized processing: Yes



## Plastic mould

Model: Plastic with mold

Weight: 4.5KG

Feeding block: 35mm

Slider stroke: 30mm

Die knife adjustment: scale rotary

Process type: stamping mould

Main processing equipment: terminal crimping

Provide customized processing: Yes

## OTP high precision horizontal mold



Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 30mm
Scope of application:
It is suitable for high-precision terminal and connection wire manufacturers with very high requirements for crimping. The ingredients are QPQ and heat-treated fine embroidery technology, which can make the product size more accurate, and it is common with JAM, Xinming and terminal machines.



## 4S-40 pneumatic horizontal die

Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various horizontal terminals

## 4E-40 pneumatic straight mold



Feeding stroke: 40mm
Slider stroke: 40mm
Scope of application: suitable for European and American series automatic and semi-automatic crimping equipment, C.H/I.H adjustment accuracy is 0.02mm, suitable for various straight terminals



## 4S-30 pneumatic horizontal die

Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: It is suitable for Japanese series automatic and semi-automatic crimping machines and domestic 30-stroke terminal machines. The crimping knife is common with OTP, and the C.H/I.H adjustment accuracy is 0.02mm.

## 4E-30 mechanical straight mold



Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 30mm
Scope of application: suitable for automotive terminals, can be used for conventional terminal machines, fine-tuning single grid is 0.02mm, large adjustable range, high precision.



## JST horizontal mode

Feeding method: horizontal feed
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: suitable for JST automatic terminal machine and hand punching machine.

## JST straight mold

Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: Suitable for JST automatic terminal machine and 40 stroke terminal machine.






## JST flag mold

Feeding method: direct delivery
Feeding stroke: 30mm
Slider stroke: 40mm
Scope of application: 187/205/250 flagship terminal matching mold, 40 stroke terminal machine.

# 4TS precision horizontal mold

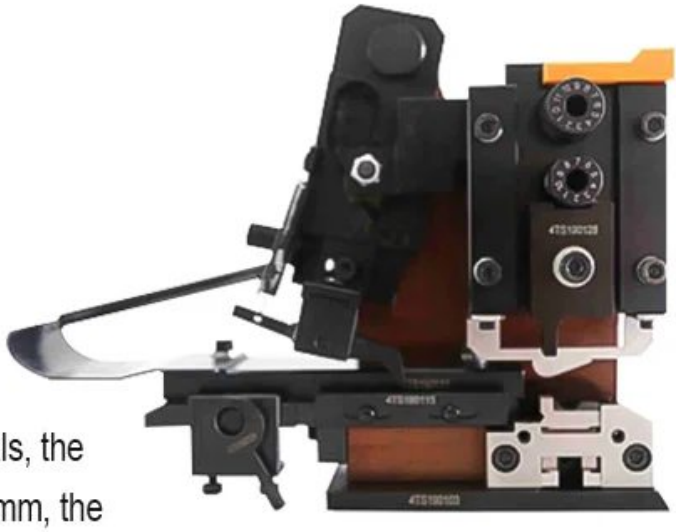

Feeding method: horizontal feed
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.

# 4TE precision straight mold



Feeding method: direct delivery
Feeding stroke: 40mm
Slider stroke: 30mm
Scope of application: suitable for all kinds of large-stroke terminals, the large and fine adjustment is 0.025mm, the small and fine adjustment is 0.15mm, the upper knife width is 26mm, and the lower knife width is 30mm. Suitable for conventional terminal machines.

OTP terminal crimping molds, OTP horizontal mode, wire crimping machine applicator, die for terminal machine